


| REV | DATE |
|-----|------|
| | |

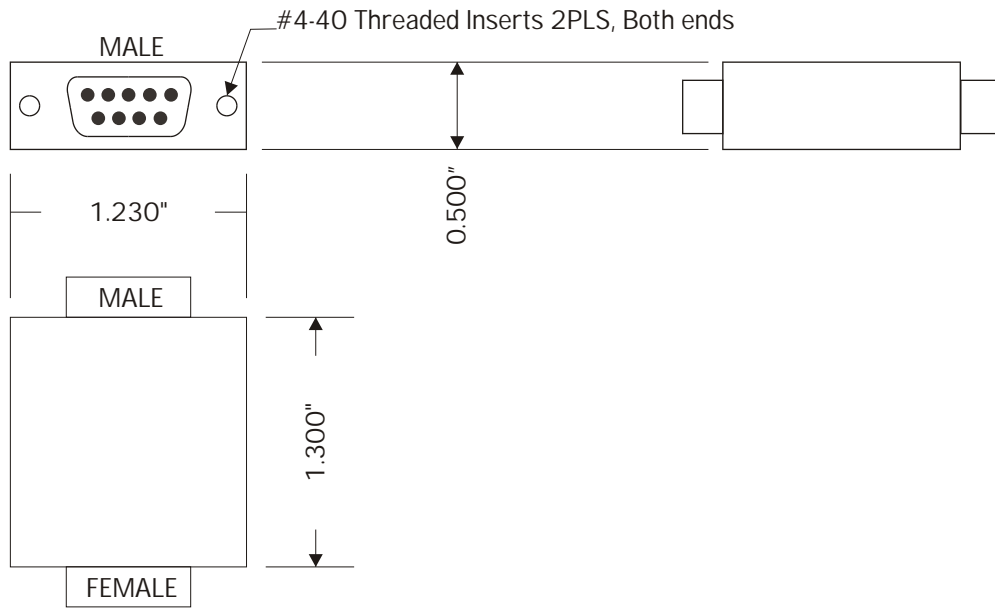


OUTLINE DRAWING

SIGNALTYPE: RS-422
 DATA RATE: 2Mbps
 BI-DIRECTIONAL: ALL LINES

| ATTENUATION | | |
|---------------|--|---------|
| Frequency | | Minimum |
| 10 KHz | | 25 dB |
| 30 KHz | | 45 dB |
| 50MHz to 1GHz | | 70 dB |

SPECIFICATIONS

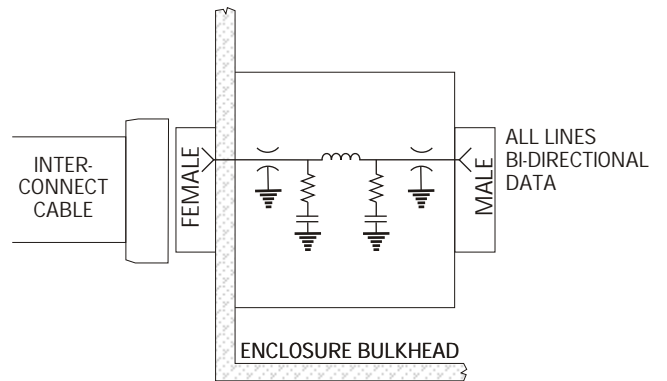

FUNCTIONAL DIAGRAM