


| REV | DATE |
|-----|------|
| | |

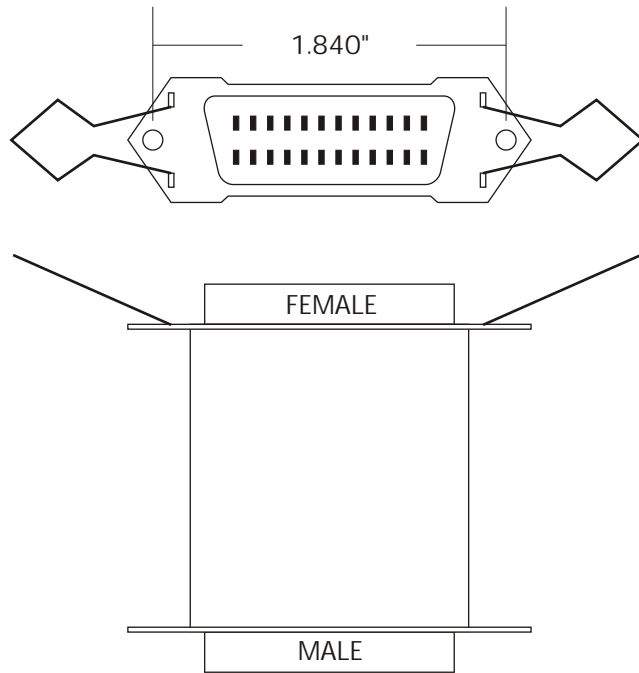


AVAILABLE IN FRONT MOUNT VERSION

OUTLINE DRAWING

PASS BAND I.L.: 0.1 dB MAX.
 PASS BAND WIDTH: 2.4 MHz TYP.
 RISE TIME: 80 ns TYP. (0.4 - 2.4 V)
 DELAY TIME: 100 ns TYP. (1.4 V)
 OVER SHOOT: 0.5 V TYP.

| ATTENUATION | |
|----------------|----------------|
| Frequency | Insertion Loss |
| 1 MHz | 3.0 dB Typ. |
| 10 MHz | 20 dB Min. |
| 20 MHz | 35 dB Min. |
| 80 MHz - 1 GHz | 65 dB Min. |

SPECIFICATIONS

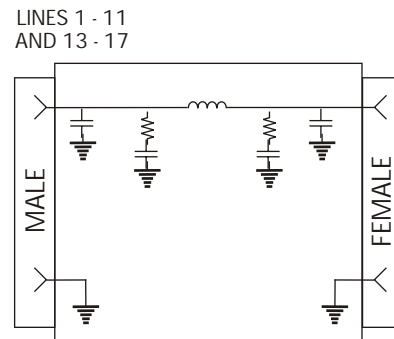

LINES 12, 18 AND 24

(OTHER PIN-OUTS AVAILABLE UPON REQUEST)

FUNCTIONAL DIAGRAM