


REV	DATE

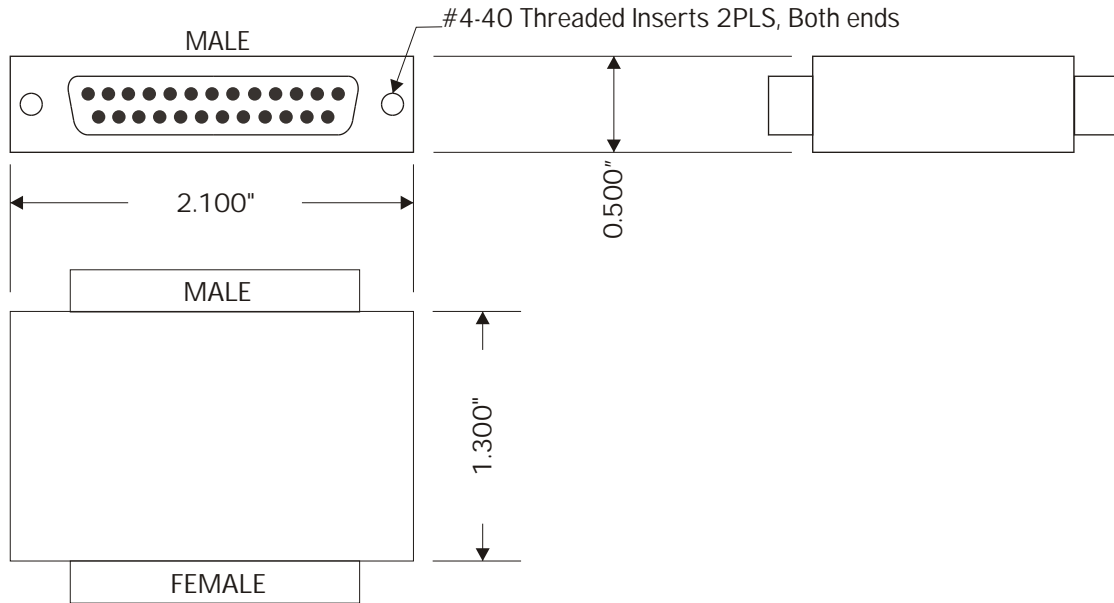

OUTLINE DRAWING

SIGNALTYPE: MEDIUM SPEED RS-422 BI-DIRECTIONAL


RISE TIME: 600ns MAX

OVER SHOOT: 4% MAX

DATA RATES: DC TO 500 Kbps

ATTENUATION		
Frequency	Typical	Minimum
10 KHz	< 1 dB	
400 KHz	< 1 dB	
2 MHz	20 dB	20 dB
5 MHz		40 dB
20MHz to 1GHz		70 dB

SPECIFICATIONS

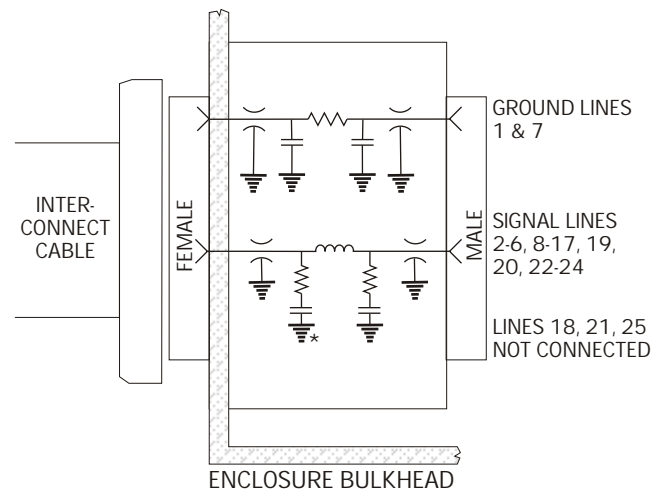

FUNCTIONAL DIAGRAM