


REV	DATE

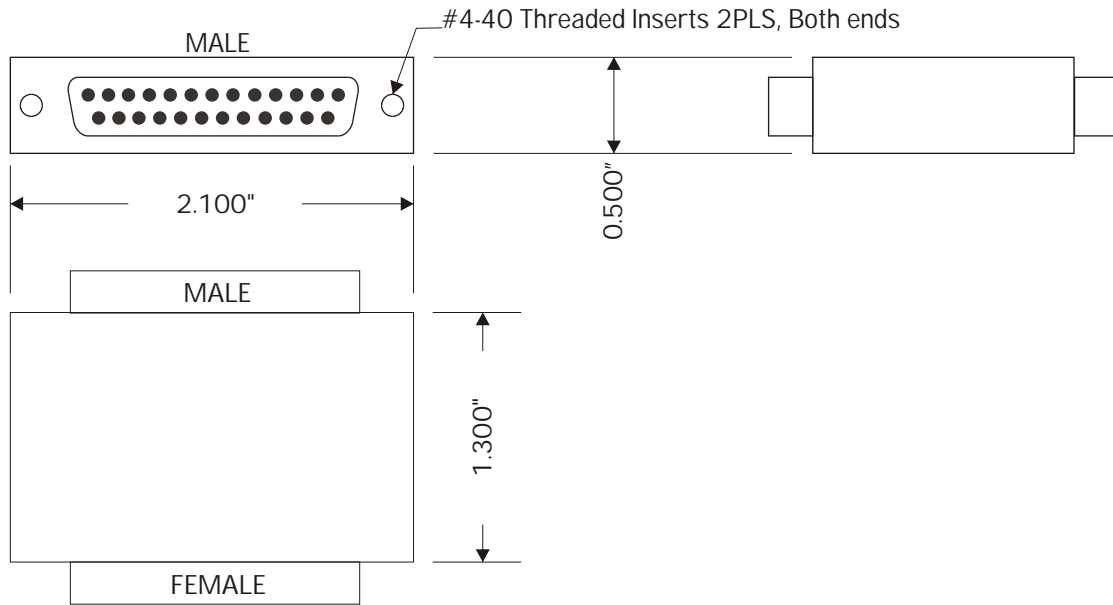

SOLDER CUP VERSIONS AVAILABLE


OUTLINE DRAWING

RISE TIME: 150 ns

IMPEDANCES: TTL/100 OHMS

ATTENUATION	
Frequency	Minimum
20 MHz	30 dB
50 MHz	50 dB

SPECIFICATIONS

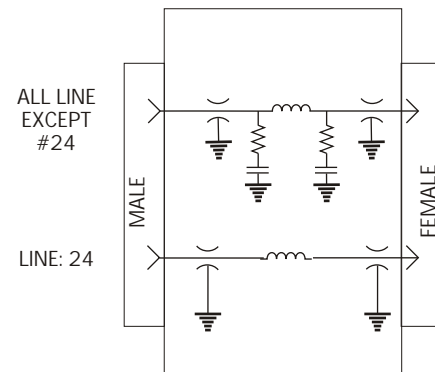

FUNCTIONAL DIAGRAM