


# PLF-284

# HIGH ATTENUATION POWER ENTRY MODULE

REV	DATE
A	4/19/05

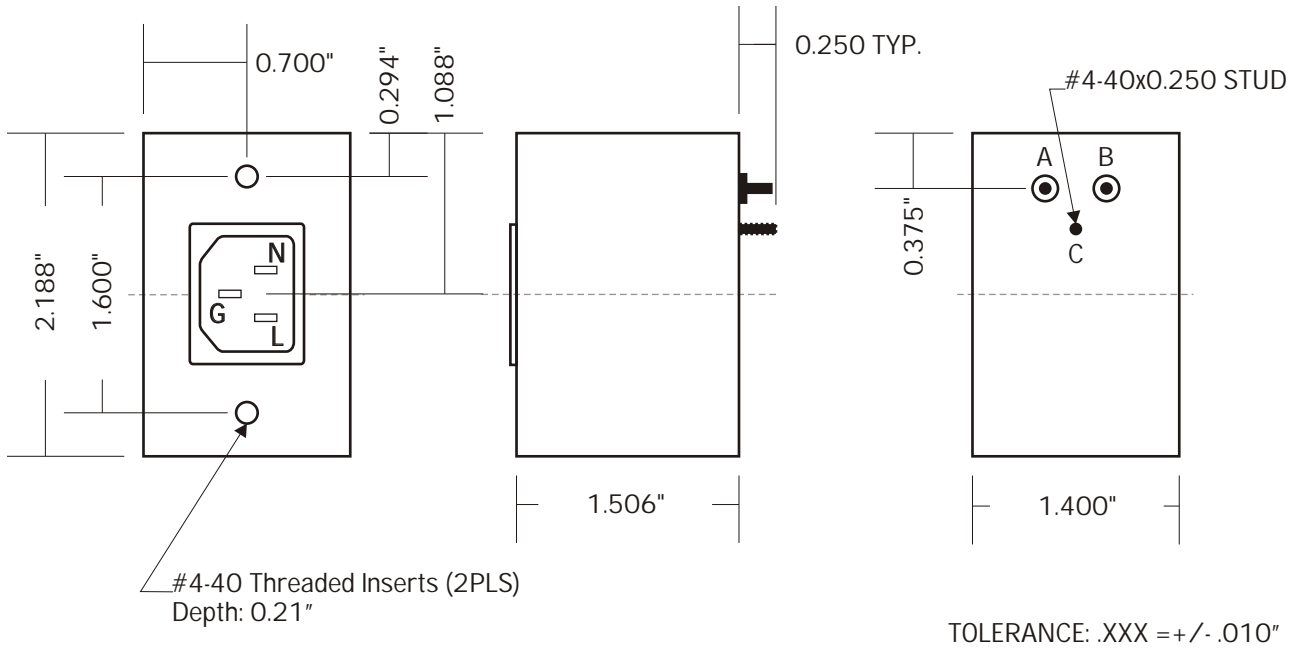

OUTLINE DRAWING

EMICON P/N: PLF-284

Line Current: 3 Amps


Line Voltage: 110/220 VAC

Leakage Current: 3 mA Max. @ 220 Vac, 50Hz

Line Frequency: 50-400Hz

ATTENUATION		
FREQUENCY	TYPICAL	MINIMUM
50 KHz	50 dB	44 dB
75 KHz	61 dB	55 dB
150 KHz	80 dB	72 dB
300 KHz	>85 dB	80 dB
1 Mhz	>95 dB	95 dB
500 Mhz	>90 dB	90 dB
1 GHz	>80 dB	85 dB

SPECIFICATIONS

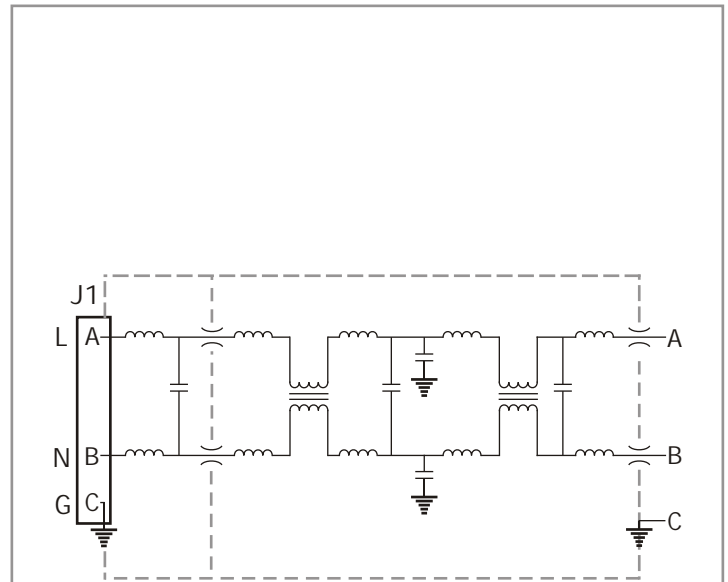

FUNCTIONAL DIAGRAM